


## CAT CX31-P600 Well Service Transmission

<https://www.zepelin-powersystems.com/de/en/>

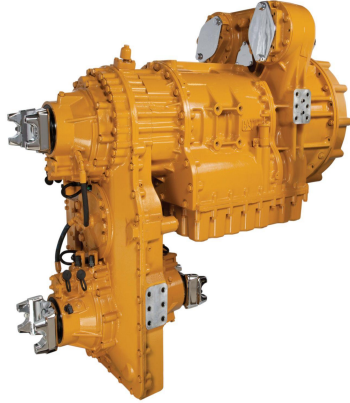

Gross Input Power	447 kW
Gross Peak Input Torque	2.746 N·m
Rated Input Speed	2.100 r/min
Maximum Turbine Torque	3.525 N·m
Minimum Input Speed	2.500 r/min
Retarder Rating	399 kW
Retarder Rating Speed	2.400 r/min
Electrical System	12 V
Gear Type	Planetary Spur
Gears	6F/1R
1F Gear Ratio	4,4
2F Gear Ratio	2,33
3F Gear Ratio	1,53
4F Gear Ratio	1
5F Gear Ratio	0,72
6F Gear Ratio	0,61
1R Gear Ratio	-3,97
Overall Gear Ration	7/21

This offer is without obligation. The offer is based on our General Terms and Conditions of Sale and Delivery. Changes to equipment and accessories required for technical reasons may be made at any time. Subject to errors, changes and intermediate sale. Statutory value-added tax shall be added to all price.